


DOB Driver On Board



Features

- AC direct-in, plug and play
- No external drivers required
- Lextar's LM-80 tested LEDs
- Excellent PF >0.9 and low THD <20%
- TRIAC dimming solution available, interfacing with smart lighting control
- No electrolytic capacitors needed, long lifetime

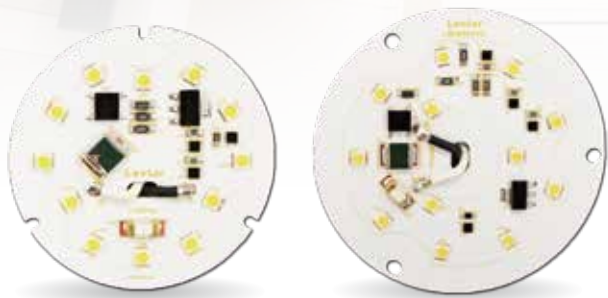

Downlight



Ceiling Light



Puff Light

Specification

Ordering Code	Dimensions Φ x H (mm)	Lumen (lm)	Power (W)	CCT (K)	SDCM	CRI	Voltage (V)	PF	Flicker Index	THD	Safety Standard
MDC7-830-091-N-EA	50 x 1	800	8.7	3000	3	80	120	>0.9	<30%	<20%	UL
MDC7-840-091-N-EA				4000							
MDC7-857-091-N-EA				5700							
MDC5-830-131-N-EA	70 x 1	1200	13	3000	3	80	120	>0.9	<30%	<20%	UL
MDC5-840-131-N-EA				4000							
MDC5-857-131-N-EA				5700							
MDC5-830-171-N-EA	70 x 1	1500	17	3000	3	80	120	>0.9	<30%	<20%	UL
MDC5-840-171-N-EA				4000							
MDC5-857-171-N-EA				5700							
MDC4-830-231-N-EA	70 x 1	2000	23	3000	3	80	120	>0.9	<30%	<20%	UL
MDC4-840-231-N-EA				4000							
MDC4-857-231-N-EA				5700							
MDC7-830-092-N-EA	50 x 1	800	8.7	3000	3	80	230	>0.9	<30%	<20%	CE
MDC7-840-092-N-EA				4000							
MDC7-857-092-N-EA				5700							
MDC5-830-132-N-EA	70 x 1	1200	13	3000	3	80	230	>0.9	<30%	<20%	CE
MDC5-840-132-N-EA				4000							
MDC5-857-132-N-EA				5700							
MDC5-830-172-N-EA	70 x 1	1500	17	3000	3	80	230	>0.9	<30%	<20%	CE
MDC5-840-172-N-EA				4000							
MDC5-857-172-N-EA				5700							
MDC4-830-232-N-EA	70 x 1	2000	23	3000	3	80	230	>0.9	<30%	<20%	CE
MDC4-840-232-N-EA				4000							
MDC4-857-232-N-EA				5700							

DCOB

Driver On COB



800 lm



2000 lm

Features

- Compatible with Zhaga Book 3 holder, reflector and heatsink
- AC direct-in, plug and play
- No external drivers required
- Excellent PF >0.9 and low THD <20%
- Compact design and DC equivalent efficacy
- No electrolytic capacitors needed, long lifetime



Spot Light



Track Light



Downlight

Specification

Ordering Code	Dimensions Φ x H (mm)	Lumen (lm)	Power (W)	CCT (K)	SDCM	CRI	Voltage (V)	PF	THD	Safety Standard
MDC7-830-091-N-DA	42 x 1	800	9	3000	3	80	120	>0.9	<20%	UL
MDC6-830-241-N-DA	46 x 1	2000	24	3000	3	80	120	>0.9	<20%	UL
MDC7-830-092-N-DA	42 x 1	800	9	3000	3	80	230	>0.9	<20%	CE
MDC6-830-242-N-DA	46 x 1	2000	24	3000	3	80	230	>0.9	<20%	CE



Lextar.com

Sales.LT@Lextar.com

© Copyright Jun 2015 Lextar. All rights reserved. Information may change without notice.



facebook